


E-POWER

HYDRAULIC STEEL HAND PUMPS For Single-Acting Cylinders or Tools

Reservoir Capacity:
850 - 2,500 cm³

Oil Delivery at Rated Pressure:
2.8 - 3.2 cm³/stroke

Maximum Operating Pressure:
700 bar (10,000 psi)




P-43A



P-122A

Features

- Single- & 2-speed pump types.
- Rugged steel body construction for long lasting performance and won't burn through in welding environments.
- Low handle efforts & easy to use.
- Grip handle provides ease of carrying.
- Large handy release valve knob for metering load down slowly.
- Internal pressure relief valve for overload protection.
- Can be used vertically with pump head facing downwards.
- Ideal for use with single-acting hydraulic cylinders or tools requiring tough hand pumps for use in harsh environments.

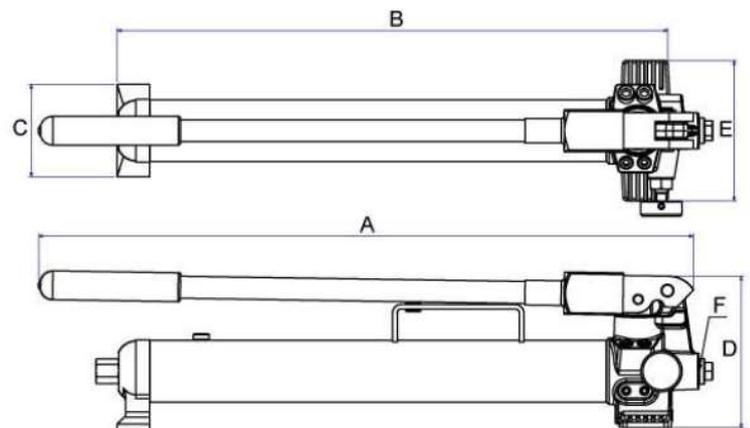

Oil Port (F): 3/8" NPT

Selection Chart

All Steel Construction

MODEL	Pump Type	Speed	Reservoir Capacity	Usable Oil Volume	Pressure Rating		Oil Delivery		A	B	C	D	E	Weight
					1 st Stage	2 nd Stage	1 st Stage	2 nd Stage						
			(cm ³)	(cm ³)	(bar)	(bar)	(cm ³ /stroke)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(kg)
P-43A	Single-acting	Single	850	640	---	700	---	3.2	632	526	90	148	137	7.6
P-90A		Two	1500	1200	20	700	13	2.8	633	551	106	200	142	11.2
P-122A		Two	2500	2200	20	700	13	2.8	713	632	106	200	142	12.0

EURO POWER HYDRAULICS PTE LTD

1 Tuas South Avenue 6 #01-11, THE WESTCOM, Singapore 637021

Tel: +65-6266 2011 • Fax: +65-6266 2028 • Email: sales@europower700.com • WWW.EUROPOWER700.COM

E-POWER

HYDRAULIC STEEL HAND PUMPS

For Single- & Double- Acting Cylinders or Tools

Reservoir Capacity:


3,500 – 8,000 cm³

Oil Delivery at Rated Pressure:

3 - 4 cm³/stroke

Maximum Operating Pressure:

700 bar (10,000 psi)



P-300A



P-800A

Features

- 2-speed pump operation reduces handle strokes & for fast operation.
- Rugged steel body construction for long lasting performance and won't burn through in welding environments.
- Clip handle provides ease of carrying.
- Large handy release valve knob for metering load down slowly (for P-300A).
- Manual control valve (for P300D & P-800A/D).
- Convenient top oil fill cap.
- Internal pressure relief valve for overload protection.
- Ideal for use with hydraulic cylinders or tools requiring tough hand pumps for use in harsh environments.



Oil Port: 3/8" NPT

Selection Chart

Heavy-Duty • All Steel Construction • Large Casting Reservoirs

MODEL	Pump Type	Speed	Reservoir Capacity	Usable Oil Volume	Pressure Rating		Oil Delivery		Weight
					1 st Stage	2 nd Stage	1 st Stage	2 nd Stage	
	(-acting)		(cm ³)	(cm ³)	(bar)	(bar)	(cm ³ /stroke)		(kg)
P-300A	Single	Two	3500	2950	28	700	30	3	16.5
P-300D	Double	Two	3500	2950	28	700	30	3	19.0
P-800A	Single	Two	8000	7200	28	700	113	4	24.7
P-800D	Double	Two	8000	7200	28	700	113	4	27.5



EURO POWER HYDRAULICS PTE LTD

1 Tuas South Avenue 6 #01-11, THE WESTCOM, Singapore 637021

Tel: +65-6266 2011 • Fax: +65-6266 2028 • Email: sales@europower700.com • WWW.EUROPOWER700.COM

E-POWER

HYDRAULIC STEEL HAND PUMPS (700 bar / 10,000 psi)

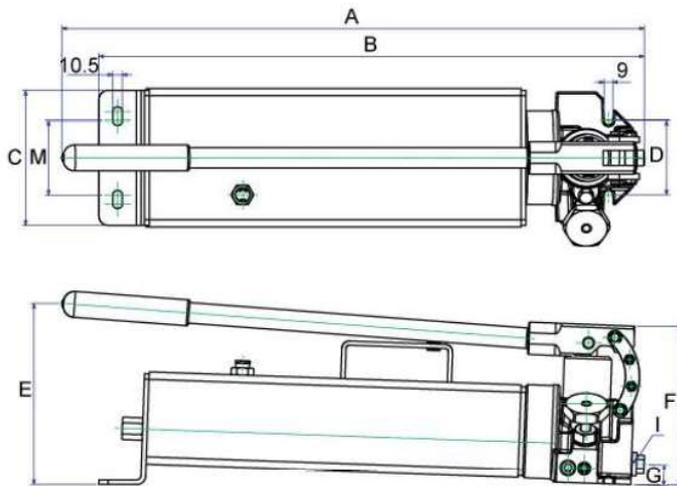

P-300D


Oil Port: 3/8" NPT

P-300A


Dimensions

MODEL	A	B	C	D	E	F	G	M	Weight
	(mm)	(kg)							
P-300A	626	586	146	81	196	172	22	81	16.5
P-300D	741	680	146	81	196	172	35	81	19.0


Heavy-Duty • All Steel Construction • Large Casting Reservoirs



Oil Port: 3/8" NPT

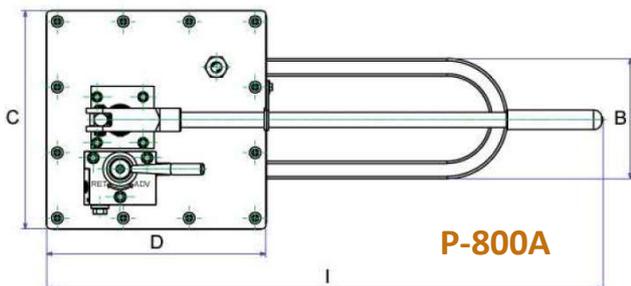

P-800A

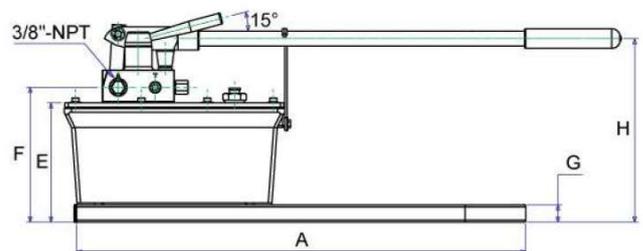

Dimensions

MODEL	A	B	C	D	E	F	G	H	I	J	Weight
	(mm)	(kg)									
P-800A	635	171	310	310	170	192	25	261	787	298	24.7
P-800D	635	171	310	310	170	196	25	261	787	298	27.5