

E-POWER

HSQD SERIES Square Drive Hydraulic Torque Wrenches, 700 bar






Self-locking
Quick Release 1/4" Coupler



Carry Box

FEATURES

- ❖ 10 standard models, with torque values ranging from 185 Nm to 49627 Nm. Available up to 150000 Nm torque values upon request.
- ❖ Al-Ti alloy material, integrated design.
- ❖ Low weight, compact and high strength design.
- ❖ Excellent torsional strength.
- ❖ 360° x 180° swivel joint prevents hoses entangling.
- ❖ 360° push-to-lock quick release lever reaction arm.
- ❖ Push-button quick release reversible square drive.
- ❖ Self-locking quick release 1/4" coupler.
- ❖ Consistent torque output accuracy of ±3%.
- ❖ Fully enclosed drive mechanism for operator safety.
- ❖ Reaction release pawl to prevent ratchet reversal.
- ❖ Other drives and reaction accessories available and can be customized upon request.
- ❖ Includes tool carrying case.

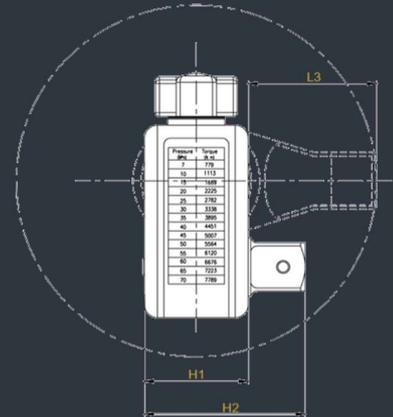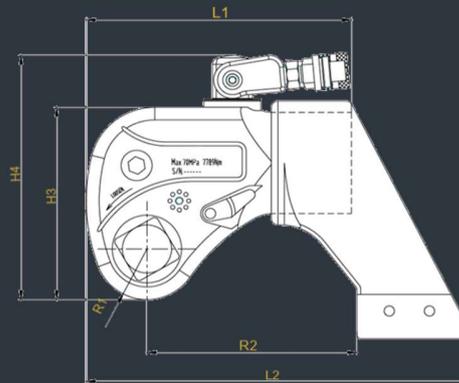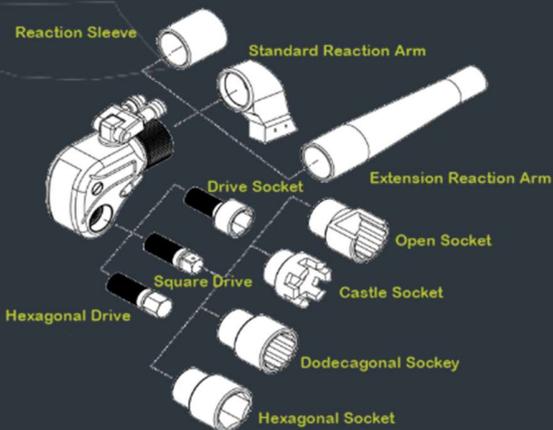

Wrench Model	HSQD1	HSQD2	HSQD3	HSQD5	HSQD8	HSQD10	HSQD15	HSQD20	HSQD25	HSQD35
Torque (Nm min.)	185	302	436	779	1072	1553	2050	2617	3493	4963
Torque (Nm max.)	1852	3017	4364	7789	10715	15528	20501	26171	34928	49627
Weight (kg)	2.7	3.6	4.8	8.8	12.0	14.5	19.0	25.0	37.5	44.0
L1 (mm)	138	149	168	207	226	250	281	304	331	390
L2 (mm)	194	213	244	296	326	366	402	442	483	558
L3 (mm)	63	70	79	99	110	120	132	146	158	177
H1 (mm)	50	60	70	80	90	100	112	120	138	150
H2 (mm)	73	87	99	124	133	146	165	183	202	219
H3 (mm)	96	111	125	152	170	186	208	226	250	282
H4 (mm)	140	157	165	193	211	227	249	267	291	323
R1 (mm)	26	29	34	40	46	50	56	60	66	77
R2 (mm)	107	112	132	162	178	199	218	240	260	298
Square Drive	3/4"	1"	1"	1-1/2"	1-1/2"	1-1/2"	2"	2-1/2"	2-1/2"	2-1/2"

EURO POWER HYDRAULICS PTE LTD

1 Tuas South Avenue 6 #01-11, THE WESTCOM, Singapore 637021

Tel: +65-6266 2011 • Fax: +65-6266 2028 • Email: sales@europower700.com •

WWW.EUROPOWER700.COM